

SELF-INSTALLATION INSTRUCTIONS



SELF-ORDERING

KIOSK

Powered by NRS

Our standup Kiosk terminal allows your customers to order and pay without interacting with a cashier.



FEATURES

- Large touch screen for easy ordering
- Kiosk ordering software
- Inventory and pricing integration with your NRS POS
- Orders sent directly to your NRS POS
- Integrated **NRSPAY** payment processing
*FREE payment processing terminal included (tap, dip, or swipe)

(1) Open bottom panel with key



(2) Plug in power cord

Power supply port is located inside of the bottom panel of the Kiosk.



[The Kiosk's power supply cord.]

(3) Turn on red switch next to power input hole

The red power switch is located inside of the bottom panel of the Kiosk.




(4) Connect ethernet cable between Ethernet Port 1 and your internet source

Ethernet Port 1 is located inside of the bottom panel of the Kiosk.



(5) Install credit card machine bracket

Use the three (3) small screws to screw the bracket into the side of the Kiosk.

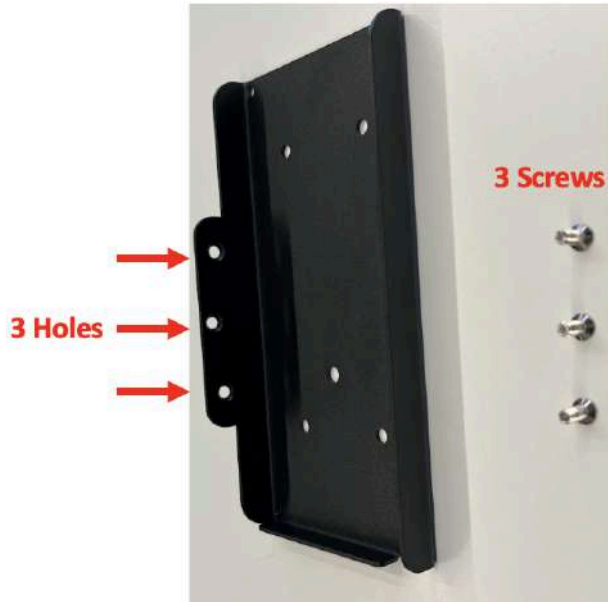

[Side view of the bracket after it has been screwed into the Kiosk.]

(6) Attach credit card machine to bracket


Use the single screw to screw the credit card machine into the bracket. The screw should go through the center hole on the bracket and into the center hole on the back of the credit card machine.



[Front view of the Kiosk after the PAX has been secured to the bracket.]

(7) Connect ethernet cable between Ethernet Port 2 and the credit card machine


Ethernet Port 2 is located inside of the bottom panel of the Kiosk.

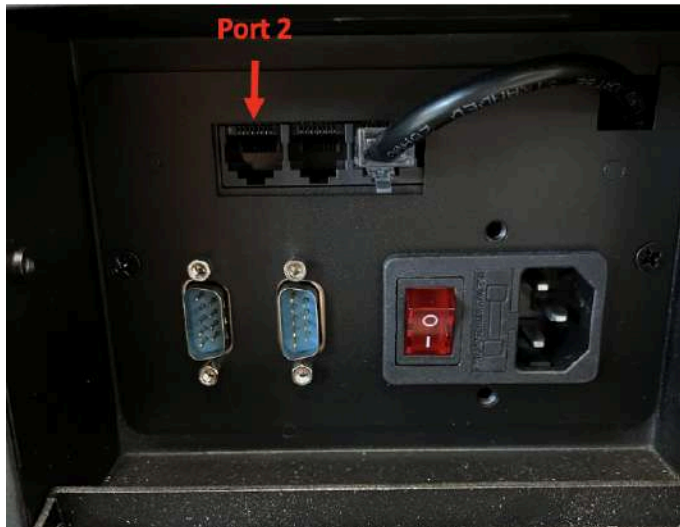

[The red ethernet port wire that is attached to the credit card machine.]

(8) Close the bottom panel and lock it. **Store the keys someplace safe!**


The wires should be put through the openings in the panel door.

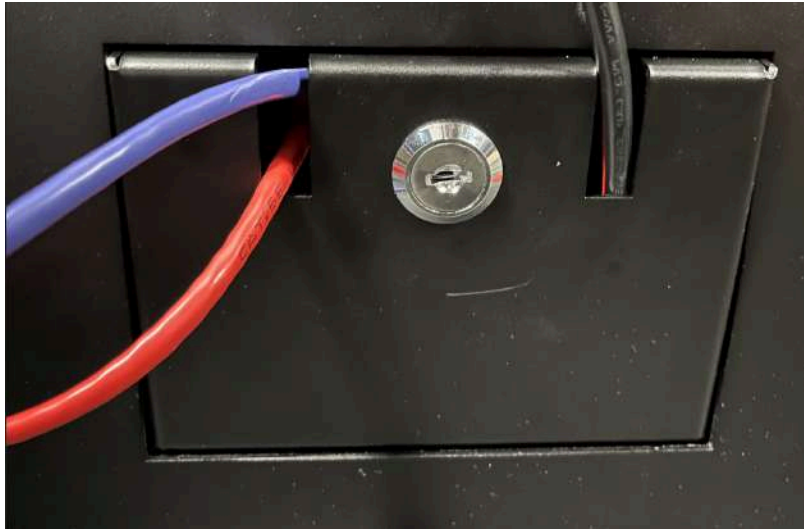


Color of Ethernet cables may vary

(9) Plug in the power cord for the credit card machine

The wire for the power cord should be connected to the credit card machine's power input wire and into the power cord box. The power cord box should then be plugged into a power source.

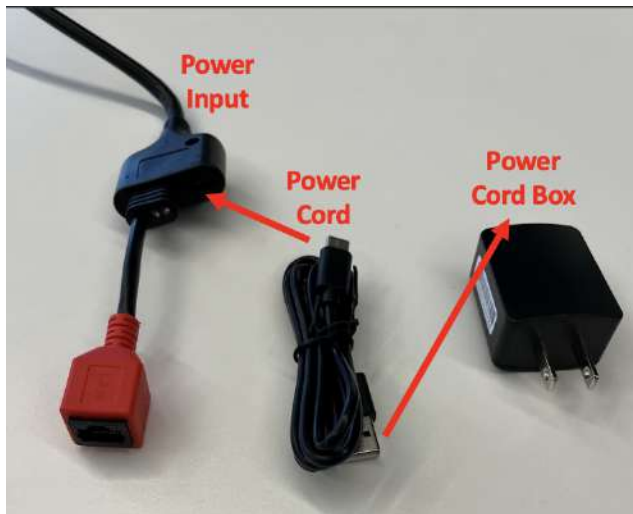

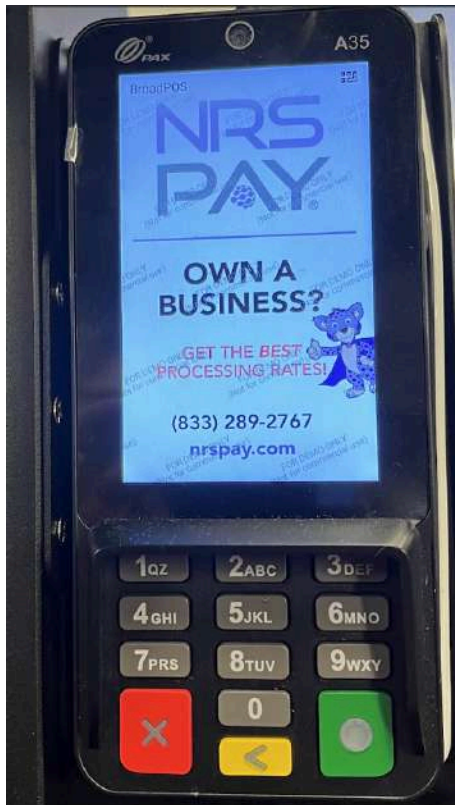

Once the power cord is plugged in, the PAX machine should turn on and you should see the NRS Pay home screen.

(10) Power on the Kiosk

Press the circle power button on top of the Kiosk screen to power on the Kiosk.





Once the power is turned on, the Kiosk software will take about 1 minute to load and then you should see the Kiosk home page. You may see an internet connection error while you wait for the software to load, but this is normal.

(11) Call NRS Customer Care to sync your Kiosk with your store's POS terminal(s).

Call **1 (800) 215-0931**; press "1" for help with your POS, then press "1" again for Technical Support. Ask the customer care representative to synchronize your new Kiosk terminal with your existing POS system(s).

(12) **IMPORTANT:** Secure the Kiosk base to the floor with the provided screws and washers.

WARNING: If you do not secure your Kiosk to the floor, your Kiosk may fall over. NRS takes no responsibility for any injuries or damages that occur from the Kiosk falling over if you do not secure your Kiosk to the floor.

Drill 2 holes into the floor and secure the Kiosk base to the floor using the 2 provided screws and washers.



*Self-ordering Kiosk subject to terms and provided by National Retail Solutions, Inc. ("NRS"). Contract required. NRS is not responsible for installation of Kiosk and/or any liability or damage that may occur due to poor or faulty installation by merchant or its agents. NRS Pay services required for kiosk operation and subject to separate contract. National Retail Solutions, Inc. is a registered MSP/ISO of Elavon, Inc., Georgia, a wholly owned subsidiary of U.S. Bancorp, Minneapolis, MN, and a registered ISO of Wells Fargo Bank, N.A., Concord, CA. Visit www.nrsplus/kiosk for full details.