



NATIONAL
RETAIL
SOLUTIONS

INSTALLATION GUIDE NRS POS

TO SET UP YOUR REMOTE TRAINING APPOINTMENT, PLEASE CALL (888) 297-1747
FOR CUSTOMER SUPPORT ISSUES, PLEASE CALL (800) 215-0931

****WARNING** DO NOT INSERT PURPLE USB DRIVE
FOR RECOVERY PURPOSES ONLY - KEEP IN SAFE PLACE**



Welcome to the NRS family!

Now that your equipment has arrived, it is time to set up your POS.

Before you begin, please make sure that you have the following:

- An active wired internet connection (not WiFi)
- Router/modem with at least one open port
- Ethernet cable (not provided by NRS)

We also highly recommend that you connect your device to a battery backup to prevent any equipment damage.

This guide will walk you through the setup of your POS System.



"Meet Paco Puma, the Official NRS Mascot!"

Hardware Included in This Box



(A) Dual-Screen POS Terminal
customer-facing screen attached



(B) Receipt Printer
Includes cable cover & paper roll



(C) Barcode Scanner
works with most 1d and 2d barcodes



(D) 4-Pin Power Supply
for POS Terminal



(E) 3-Pin Power Supply
for Receipt Printer



(F) RECEIPT PRINTER CABLE
USB-A to USB



(G) BARCODE SCANNER CABLE
RJ45 to USB

Connecting the POS Terminal

1. Place the POS terminal on your counter, gently lift the customer-facing screen, then pull the cable back panel from terminal at a slight angle.



2. Connect your router/modem† to the POS terminal (A) using an ethernet cable†

Note: An active wired internet connection is required to use the NRS POS+ System. WiFi will NOT work.



3. Connect the 4-pin power supply (D) to the back of the POS terminal (A)



Connecting the Receipt Printer to the POS Terminal

1. Connect the 3-pin power supply (E) to the back of the receipt printer (C)




2. Connect the receipt printer (B) to the POS terminal (A) using the receipt printer cable (F)


Note: To remove the back panel of the POS terminal, Gently lift the customer-facing screen, then pull the cover away from terminal at a slight angle.



3. Plug the cash drawer into the printer (B) (**CASH DRAWER NOT INCLUDED WITH LITE MODELS**)

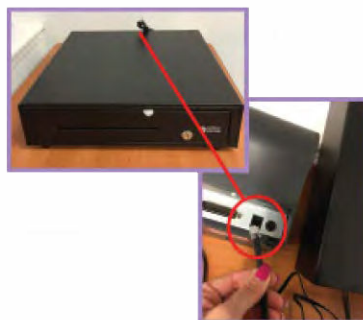


4. Connect the 3-pin power supply (E) to your plug socket or battery backup

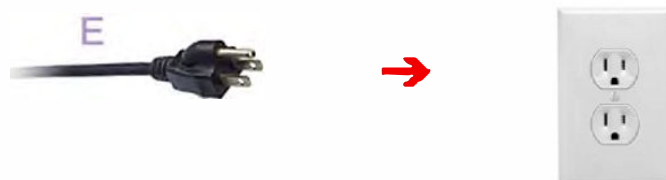

Connecting the Barcode Scanner to the POS Terminal

1. Connect the barcode scanner (C) to the POS terminal (A) Using the barcode scanner cable (G)

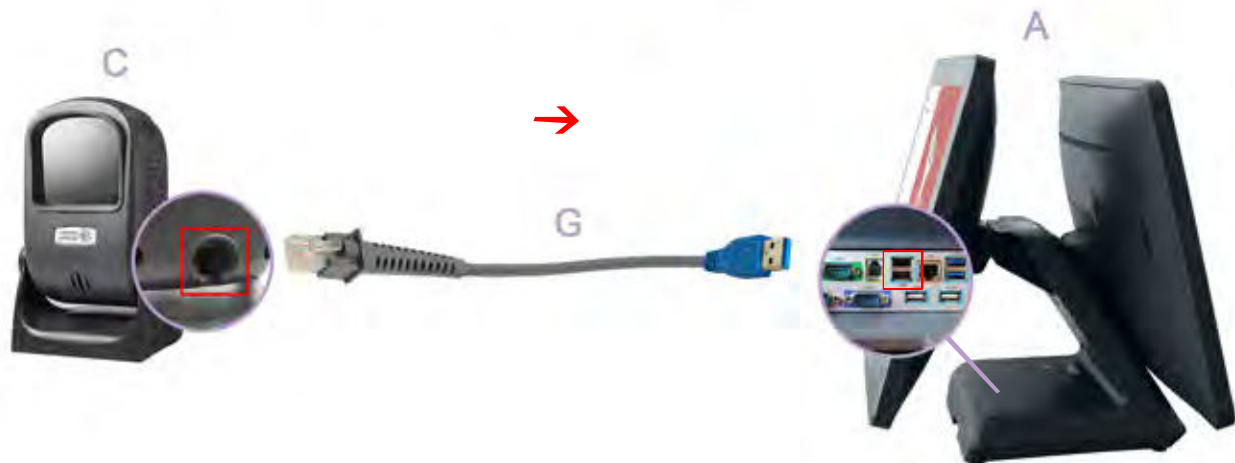

Note: The barcode scanner will power on automatically when you turn on the POS terminal.

Powering Up the POS Terminal

1. Reinsert the back panel of the POS terminal (A) and connect the 4-pin power supply (D) to your plug socket or battery backup



2. Rotate the POS terminal (A) and turn it on using the power button on the left-hand side of the retailer screen



3. Complete the application that appears on-screen, wait until the POS Terminal restarts then login using the admin account (*The default password is '11111'*)





You're All Set!

Thank you for choosing National Retail Solutions for your business!

**PURCHASE ADDITIONAL POS, PARTS & ACCESSORIES AT [NRSMARKET.COM](https://nrsmarket.com),
NRS MARKETPLACE ON YOUR POS OR VIA THE MY NRS STORE MERCHANT APP.**



To learn more about our POS, visit our online learning center at **campnrs.com**

