

PAX S300 FOR USE WITH THE NRS POS



Your Pax S300 has arrived! With your new terminal, which integrates seamlessly with the NRS POS, you now have an all-in-one retail ecosystem for success. This means you have the best card processing services for checking out customers more quickly and efficiently. You can easily access your credit card batch reports in your POS and online merchant portal. We're excited for you to start saving money with your new terminal. *If you have any questions, please refer to the manual at nrsplus.com/paxs300manual or contact Customer Support at 800-215-0931.*


EASY ACTIVATION OF YOUR NEW PAX S300 (CREDIT CARD PROCESSING) TERMINAL TO YOUR NRS POS

YOU MUST ACTIVATE IMMEDIATELY! NRS PAY MAINTENANCE FEES WILL BEGIN TO BE CHARGED TO YOUR ACCOUNT WHEN THE UNIT IS SHIPPED OUT TO YOU

A) SETTING UP YOUR NRS POS FOR PAX S300 UNIT:




1) At home screen, select the red tile with the name "Tools"



2) Select "Store Setup" blue icon



3) Select "Credit Card" tab

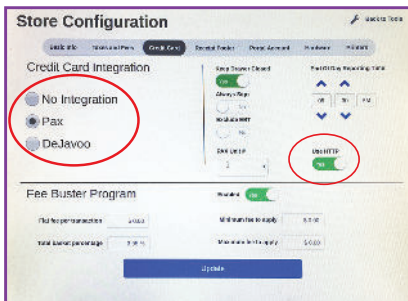

4) In **Credit Card Integration** area, select "Pax" (depending which unit is being used),

5) If Pax, select "Pax".

a) **Keep Drawer Closed** - defaulted to "No"

b) **Always Sign** - defaulted to "No"

c) **Exclude EBT** - defaulted to "No"

d) **PAX Unit #** - If first unit, delegate PAX Unit # as "1"
(If additional units are being activated, please contact us)

e) **Use HTTP** - defaulted to "Yes"


f) Set **Batch Closing time** close to 9:30PM EST**

g) Touch "Update" to save changes

h) Select the upper right tool icon "Back to Tools"

*YES - if merchant wants signatures for all transactions

**Or the time in merchant's time zone corresponding to 9:30 PM EST




6) Select the upper right tool icon "Back to Home"



B) PLUGGING IN YOUR PAX S300 UNIT:



1) Connect the power supply cable to the triple headed plug, and **after** that, connect the power supply to the wall outlet or battery backup (UPS).



2) Connect the internet cable to the red port from the S300, and the other side of the cable to the **router** or **gigabit switch**. **THIS MUST BE THE SAME ROUTER NETWORK WHERE THE NRS POS IS CONNECTED.**



3) Pax and POS should now both be online. To check your POS, use "Allow Local Scan" to verify that the IP (4 sets of numbers) is active. When you start/reboot your Pax terminal, the active IP will also briefly display on the Pax screen and must match the first three sets of numbers (in example above, this is 10.244.168).

NOTE: If the Pax unit is improperly connected, enabling will be unsuccessful. For assistance, call Customer Support: 800-215-0931.

C) ALMOST DONE! TO VERIFY ACTIVATION, GO TO POS REGISTER & COMPLETE A TRANSACTION FOR .01 CENT, USING THE "CREDIT" PAYMENT OPTION.

NEED HELP? FOR SUPPORT, CALL 800-215-0931